Model	Capacity @ 500 mm LC	Fuel Type	Engine
2035H (LPG)	3,500 kg	Dual: Gas/LPG	Nissan K25 / 2.488 L

2035H

LPG / Gas Pneumatic Tire Forklifts







2035H LPG / Gas Pneumatic Tire Forklifts



General -	1	Model			2035H(LPG)
	2	Power Type			Dual: Gas/LPG
	3	Base Capacity	@ rated load center	kg	3,500
	4	Load Center		mm	500
Weights	5	Service Weight	unloaded	kg	4,750
	6	- Axle Load	loaded / unloaded, front	kg	7,275 / 1,700
	7		loaded / unloaded, rear	kg	975 / 3,050
Tires -	8	Tire Type		-	Pneumatic
	9	Wheels	front / rear		2/2
	10	Wheelbase		mm	1,700
	11	Tire Size	front		28x9-15-12PR
	12		rear		6.50-10-10PR
	13	Tread Width	front / rear		1,000 / 980
	14	Max. Fork Height	with std 2 - stage mast	mm	3,000
	15	Freelift	with std 2 - stage mast	mm	130
	16	Height, Upright Lowered	with std 2 - stage mast	mm	2,120
	17	Height, Upright Extended	with std 2 - stage mast	mm	4,278
Mast	18	Mast Tilt, Fwd / Back	with std 2 - stage mast	deg	6° / 10°
	19	Carriage	width	mm	1,100
	20	Fork Spread	minimum / maximum	mm	272 / 1,072
	21	Fork Dimensions	T×W×L	mm	50 x 122 x 1,070
Chassis -	22	Length to Fork Face	with std 2 - stage mast	mm	2,730
	23	Overall Width		mm	1,240
	24	Overhead Guard Height		mm	2,170
	25	Turning Radius	minimum outside	mm	2,450
	26	Fork Overhang	with std 2 - stage mast	mm	480
	27	Right Angle Stack	add load length and clearance	mm	4,195
	28	- Ground Clearance	minimum loaded	mm	120
	29		center of wheelbase	mm	135
Performance	30	Travel Speed	loaded / unloaded	kph	19 / 20
	31	Lift Speed	loaded / unloaded	m/s	0.42 / 0.52
	32	Lower Speed	loaded / unloaded	m/s	0.6 / 0.4
	33	Max. Drawbar Pull	loaded	kg	2,105
	34	Max. Gradeability	loaded / unloaded	%	18 / 20
Systems	35	- Brakes	service		Foot / Hyd
	36		parking		Hand / Mech
	37	38 39 40 Engine	manufacturer		Nissan
	38		model		K25
	39		emission compliance		N/A
	40		cylinders		4
	41		displacement	L	2.488
	42		rated power	kW/rpm	37.4 / 2,300
	43		max. torque	N • m/rpm	176.5 / 1,600



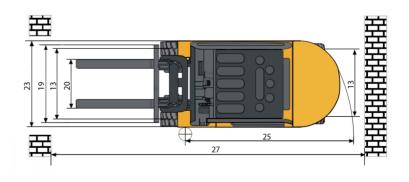

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutal Road, Liuzhou, Guangxi 545007, PR China T: +86 772 3886124 E: overseas@liugong.com www.liugong.com